

LED Emergency Exit Sign

Order Model: GR-EM-3WA




Standard Feature

- 6063 Anodic aluminum housing
- Clear Acrylics panel+screen printed or stickers or CNC engraving transparent
- Advanced wide angle white LEDs and efficient driver circuit low energy LEDs as light source
- Long-life, maintenance-free, rechargeable Ni-Cd batteries
- Internal solid-state transfer switch automatically connects internal batteries to LED board for emergency illumination.
- Over-charged and over-discharged protection
- 110 VAC or 230VAC voltage operation ,
- Provides excellent viewing distances of 24 meters.
- Single side or double side is available.
- Wall,Hanging mounting
- Standard:EN-60598-2-22
- IP20

General Specification

Mode : GR-EM-3WA		3hr Duration
Operation		Maintained
Light source		8PCS SMD LED
Battery(Ni-Cd,Ni-Mh)		3.6V300mAh
Charge current		20ma
Recharge period		<24hr
Input voltage	90-110VAC or 220-240VAC 50/60Hz	
Luminous Flux		50lm
Color Temperature		White/Green
Test		M3 push on button
Indicators		Φ3 LED Green :charge
Standard		IEC/EN60598-2-22
Ta		0-40°C
IP Rating		IP20
Product Size		368*210*23mm
Pcs/Carton		20
Package Size		385*310*445mm
Package Size		385*310*520mm(for ceiling)
N.W.		12Kg
G.W.		13Kg

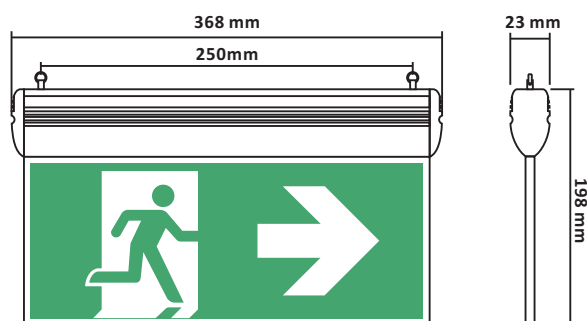


BATTERY TECHNOLOGY

The Emergency Lighting is designed with a maintenance free,nickel-cadmium battery providing a minimum emergency duration of 180 minutes. An optional 90 or 120 minute nickel-cadmium battery is available. Recharge time of the battery is twenty-four [24] hours.

LED Emergency Exit Sign



Mounting Options

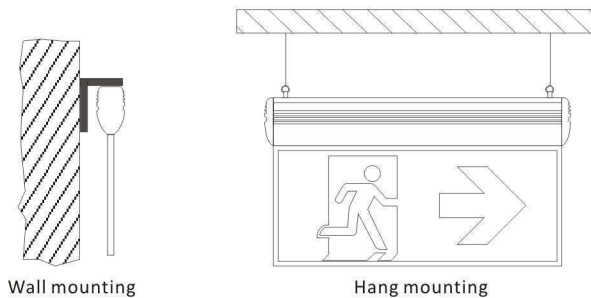

Optional Accessories



Optional legends

(Please refer to the Legend page)

